



ESS Solution

SE-F5 & SE-F5 Plus & SE-F12 & SE-F16 & SUN-3/3.6/5/6K-OG01LP1-EU-AM2

SE-F5 & SE-F5 Plus & SE-F12 & SE-F16

- Comprehensive Protection**
Advanced BMS with active fuse
- Superior Performance**
Support Max. 1C charge & 1.2C discharge (SE-F5 & F5 Plus), GaN MOSFETs: 50% loss reduction, high-temp resistance
- Optimized Energy Density**
Integrated PACK: reduced line loss, enhanced energy density
- Flexible Expansion**
Max. 32 units in parallel
- Easy Maintenance**
Auto-networking, Local monitoring mode for battery, remote monitoring mode for ESS
- Reliable Durability**
Operates reliably in -20°C to 55°C, natural cooling

SUN-3/3.6/5/6K-OG01LP1-EU-AM2

- High Performance**
Support a peak output of 2 times the rated power for up to 10 seconds
- Outdoor-Ready**
IP65-rated, built to withstand tough environments
- Durable & Reliable**
Independent cooling design reduces dust accumulation and extends lifespan
- High Efficiency**
4ms UPS-level switching time
Max. efficiency of 97.6% for optimal performance
- Smart MPPT Technology**
2 MPPTs, supports 1.6x PV oversizing (18A+18A), optimizing energy from panels at various angles
- Long-Term Assurance**
5-year warranty, extendable to 10 years for peace of mind
- Parallel Scalability**
Supports 16 pcs parallel (off-grid)
- Generator Integration**
Support storing energy from diesel generator

ESS Solution



• SE-F5 & SE-F5 Plus

• SE-F12

• SE-F16


Model		SE-F5	SE-F5 Plus	SE-F12	SE-F16
Main Parameters					
Battery Chemistry		LiFePO ₄			
Capacity		100 Ah		230 Ah	314 Ah
Scalability ^[1]		Max. 32 pcs in parallel			
Nominal Voltage		51.2 V			
Operating Voltage		44.8 V ~ 57.6 V			
Nominal Energy		5.12 kWh		11.8 kWh	16 kWh
Charge Current ^[2]	Max. Continuous	100 A		230 A	160 A
	Peak	120 A (10 sec)		280 A (10 sec)	
Discharge Current ^[2]	Max. Continuous	120 A		230 A	
	Peak	150 A (10 sec)		280 A (10 sec)	
Other Parameter					
Recommend Depth of Discharge		80% DoD		90% DoD	
Dimension (W × H × D) (Without hanging board)		370 × 548 × 140 mm		400 × 583 × 233 mm	400 × 708 × 233 mm
Weight Approximate		41 kg		82 kg	107 kg
LED Indicator		LED (SOC, working, protecting) & Buzzer			
IP Rating of Enclosure		IP21			
Operating Temperature		Charge: 0~55°C / Discharge: -20°C~55°C			
Storage Temperature		0~35°C			
Relative Humidity		95% (non-condensing)			
Altitude		≤3000m			
Cycle Life		≥6000(25°C±2°C,70%EOL)			
Installation		Wall-Mounted, Floor-Mounted, Stack-Mounted			
Communication		CAN2.0, RS485, Bluetooth+APP			
Warranty Period ^[3]		5 years	10 years	5 years / 10 years (extended warranty)	
Energy Throughput ^[3]		8 MWh	16 MWh	18 MWh	25 MWh
Certification		UN38.3, MSDS			

[1] Max. 64 pcs can parallel with CAN-Box.

[2] The current is affected by temperature and SOC.


[3] Conditions apply, refer to Deye Warranty Letter.

Model SUN-3K-OG01LP1-24-EU-AM2 SUN-3.6K-OG01LP1-EU-AM2 SUN-5K-OG01LP1-EU-AM2 SUN-6K-OG01LP1-EU-AM2

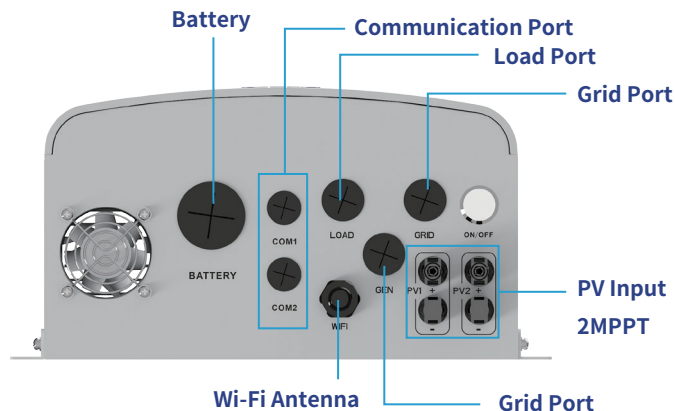

- ◎ **Battery Port**: Connects to the battery for energy storage, supporting 40-60V DC with a max charge/discharge current of 135A.
- ◎ **Communication Port**: Enables data exchange and system monitoring for seamless operation.
- ◎ **Load Port**: Delivers stable AC power to connected household loads.
- ◎ **Grid Port**: Links to the utility grid for energy exchange and system stability.
- ◎ **Generator Port**: Connects to a backup generator for additional power supply during outages.
- ◎ **PV Input**: Supports solar panel connection with 2 MPPTs, handling up to 9600W input power.
- ◎ **Wi-Fi Antenna**: Allows wireless connectivity for remote monitoring and system management.

Model SE-F5 & SE-F5 Plus & SE-F12 & SE-F16

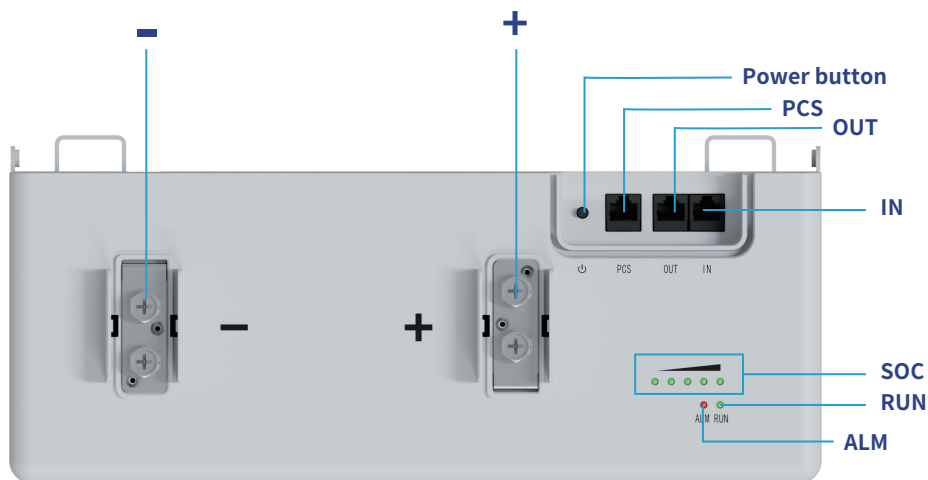

- ◎ **-**: Battery negative terminal connection position.
- ◎ **+**: Battery positive terminal connection position.
- ◎ **SOC**: These 5 LEDs are used to display the pack SOC and charge or discharge state.
- ◎ **RUN** light: green LED lighting to show the battery running status.
- ◎ **ALM** light: red LED lighting to show the battery has been alarmed.
- ◎ **Power button**: Power on or off the control battery.
- ◎ **PCS**: Inverter communication terminal: (RJ45port) follow the CAN protocol (baud rate:500kbps), and RS485 (baud rate:9600bps), used to output battery information to the inverter.
- ◎ **OUT**: parallel Communication Terminal: (RJ45port) Connect "IN" Terminal of Next battery, for Communication between multiple parallel batteries.
- ◎ **IN**: parallel Communication Terminal: (RJ45 port) Connect "OUT" Terminal of Previous battery, for Communication between multiple parallel batteries.

Deye APP




Bluetooth APP Monitoring




Low Power (Bluetooth LE)



Automated upgrade

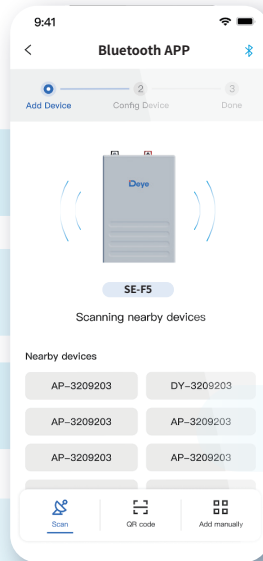

Local monitoring mode for battery

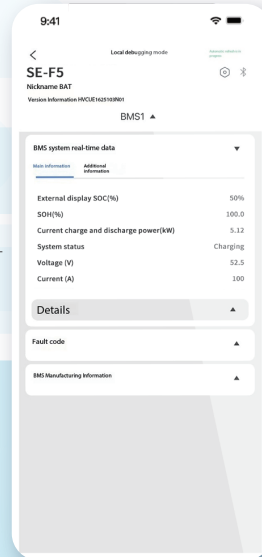

Quick Pairing





No Internet Needed



Portable Control



Remote monitoring mode for ESS(Inverter&Battery)

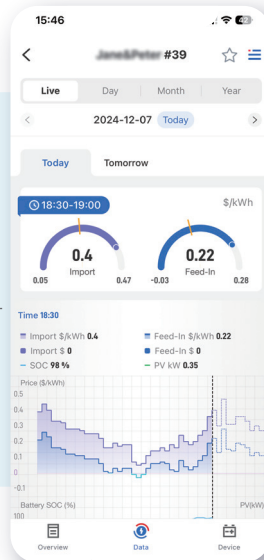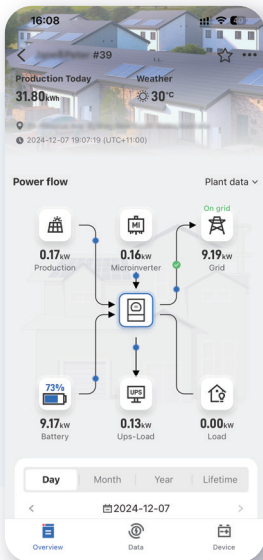

Real-time Equipment Monitoring



Intelligent Charging/Discharging Strategies



AI Data Analytics



Customized Maintenance

Smarten Up Your Home Energy



Download Deye APP to join us!

Embrace a seamless, effortless energy experience that's both ecofriendly and budget-friendly with our intelligent assistant



Deye ESS / Deye New Energy



www.deyeess.com / www.deyeinverter.com